



UNIVERSITAT POLITÈCNICA
DE CATALUNYA
BARCELONATECH



Swansea University
Prifysgol Abertawe



Centrale
Nantes

AIRBUS
GROUP

VOLKSWAGEN
AKTIENGESELLSCHAFT

SIEMENS



Marie Skłodowska-Curie Actions
Innovative Training Networks
European Training Network
number 675919
AdMoRe project

Model Order Reduction for Non Linear Mechanics.

PhD student:

Rubén Ibáñez Pinillo

Supervisors:

F. Chinesta, E. Abisset-Chavane,
A. Huerta

Industrial Correspondants:

E. Abenius, J.L. Duval

November 22-23, 2017. CM3, Brussels

Motivation of the project

Context:

Automotive industry is moving towards a new generation of cars.

Main idea:

Cars are furnished with radars, cameras, sensors, etc... providing useful information about the

environment surrounding the car.

Register for free at <https://www.scipedia.com> to download the version without the watermark

Goals:

Provide an efficient model for the radar input/output.

Reducing computational costs by means of big data techniques.



Introduction

Ways to reduce the computational cost:

1.Reduce the complexity of the model.

Maxwell equations need a very fine mesh due to high frequency constraints.

Far-Field approaches tend to be less accurate in near field.

Register for free at <https://www.scipedia.com> to download the version without the watermark



| Models | Maxwell Equations | Far-Field Approaches | Geometrical Optics |
|-----------|-------------------|----------------------|--------------------|
| Real Time | | | |
| Accuracy | | | ?? |

2.Use manifold learning techniques to unveil relevant information.

The Concept of Manifold

Manifold: A subspace of dimension N belonging to a space of dimension D , where physics is organized.

$$\mathcal{M} = \{\mathbf{x} \in \mathcal{R}^D | f(\mathbf{x}) = 0\}$$

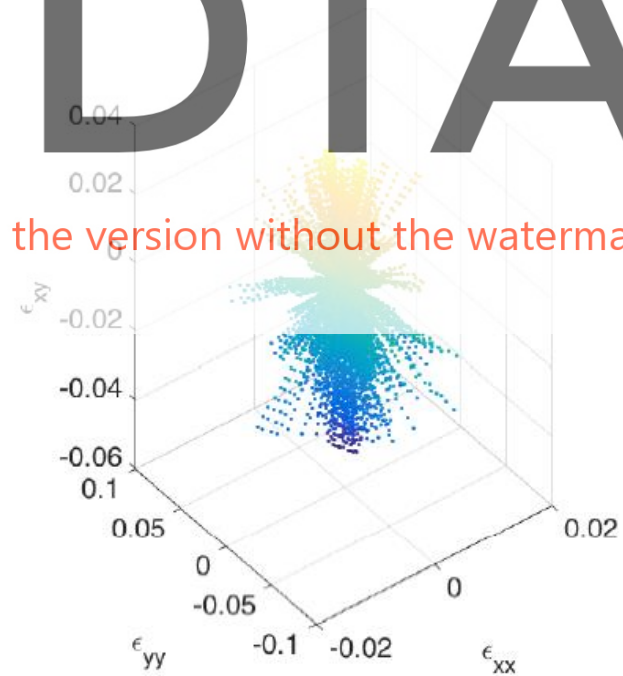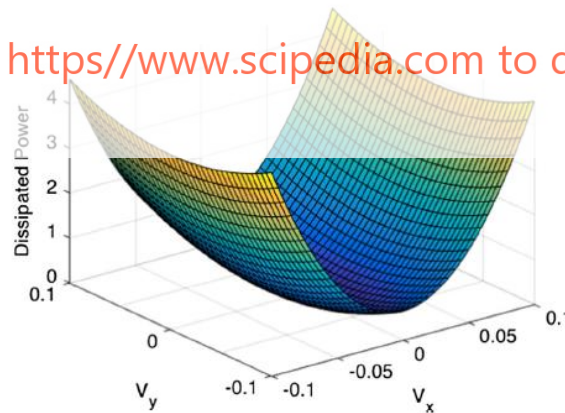

Register for free at <https://www.scipedia.com> to download the version without the watermark

The Concept of Manifold

How can a manifold help in model order reduction?

Marie Skłodowska-Curie
ITN-ETN

AdMoRe

UNIVERSITAT POLITÈCNICA
DE CATALUNYA
BARCELONATÈCH

Swansea University
Polytechnic of Wales

Centrale
Nantes

SIEMENS
GROUP

VOLKSWAGEN
AKTIENGESellschaft


SIEMENS

esi

SCIPEDIA

PCA

Register for free at <https://www.scipedia.com> to download the version without the watermark

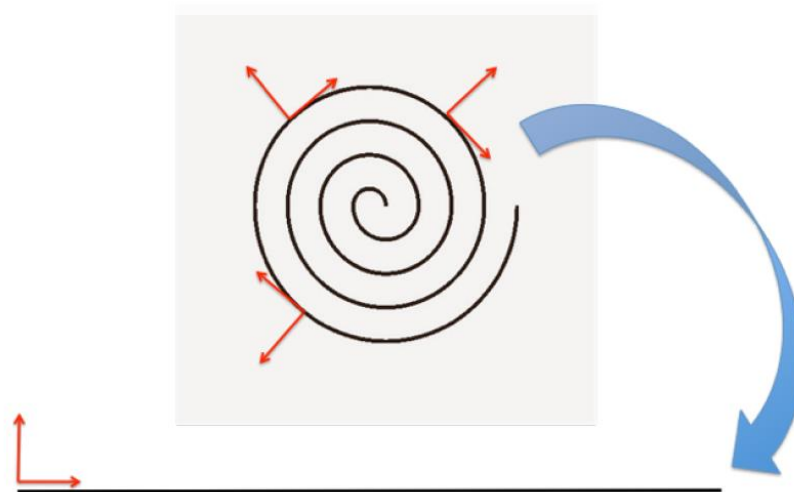

Motivation of the project

Context:

Nonlinear dimensionality reduction becomes a powerful tool for extracting the manifolds that can be then used for making safely interpolations, for extracting the uncorrelated parameters that models involve and for defining general parametric solutions.

Gather the information in the **manifold** as an **off-line** stage, then making simulations **faster** in the **on-line** stage.

Register for free at <https://www.scipedia.com> to download the version without the watermark

Goals:

Extract relevant information is extracted when the data is organized in some specific pattern.

Reduce the computational cost associated to the electromagnetic simulation of the **autonomous car**.

Outline

-Geometrical Optics

-Fundaments

-Scenario

-Convergence

-Black-Boxing the Scenario

-Scenario Manifold

-Future Work

Register for free at <https://www.scipedia.com> to download the version without the watermark

Marie Skłodowska-Curie
ITN-ETN

AdMoRe



Swansea University
Polytechnic of Wales

Centrale
Nantes

VOLKSWAGEN
AGTIENGESELLSCHAFT

SIEMENS



SCIPEDIA GEOMETRICAL OPTICS

Register for free at <https://www.scipedia.com> to download the version without the watermark

Geometrical Optics: Fundamentals

Optical reflections are produced inside the domain.

Marie Skłodowska-Curie
ITN-ETN

AdMoRe

UNIVERSITAT POLITÈCNICA
DE CATALUNYA
BARCELONA

Swansea University
Polytechnic of Wales

Centrale
Nantes

FAIRBOS
GROUP

VOLKSWAGEN
ARTIFICEGESellschaft

SIEMENS

esi



Register for free at <https://www.scipedia.com> to download the version without the watermark

Each time a reflection is produced, some amount of energy is retained in the surface controlled by a parameter called absorption coefficient.

$$E_{ext}(x_0) = E_{int}(x), x \in \partial\Omega$$

In our case the external energy will be the energy sent out by the radar and we will capture only the energy coming back to the receptor.

Geometrical Optics: Fundamentals

Single Ray Equation emisor and
receptor located at x_0



Register for free at <https://www.scipedia.com> to download the version without the watermark

Repeating the procedure for any possible angle of departure:

$$e_{absorbed} = M e_{external}$$

The (i,j) component of the matrix is the energy coming back to the source with a discretized arrival angle $\alpha_a = i\Delta\alpha$ which has been thrown from an angle of departure $\alpha_d = j\Delta\alpha$

Geometrical Optics: Fundamentals

Possible Quantities of Interest

Marie Skłodowska-Curie
ITN-ETN

AdMoRe

Dep./ Arr. Energy

$$E_{DA} = E(\alpha_d, \alpha_a)$$

Departure Energy


$$E_D = \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} E(\alpha_d, \alpha_a) d\alpha_a$$

Arrival Energy

$$E_A = \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} E(\alpha_d, \alpha_a) d\alpha_d$$

Total Energy

$$E_T = \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} E(\alpha_d, \alpha_a) d\alpha_d d\alpha_a$$






Geometrical Optics: Simple Case

Both source and receptor are located at the middle point of the south wall. (Red point)

Marie Skłodowska-Curie
ITN-ETN

AdMoRe

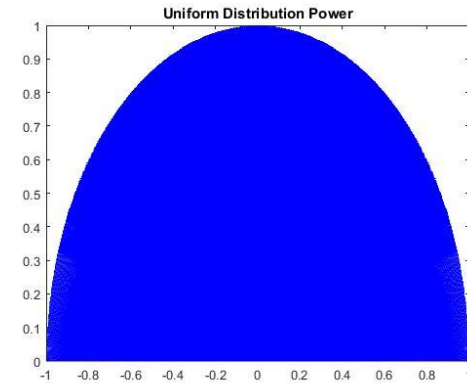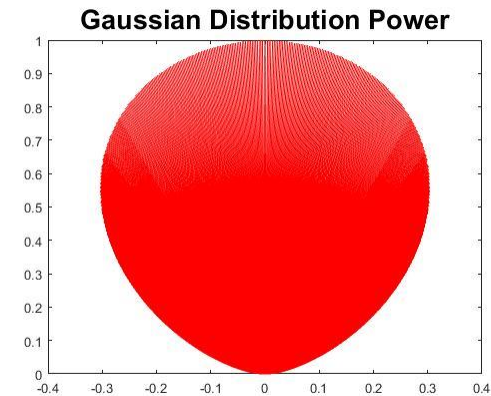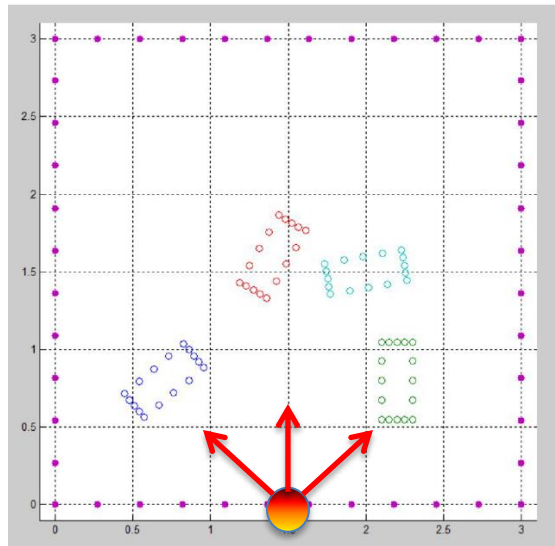

Geometrical Optics: Simple Case

Marie Skłodowska-Curie
ITN-ETN

AdMoRe


UPC
UNIVERSITAT POLITÈCNICA
DE CATALUNYA
BARCELONATECH





Swansea University
Prifysgol Abertawe

Centrale
Nantes

AIRBUS
GROUP
VOLKSWAGEN
AKTIENGESellschaft
SIEMENS

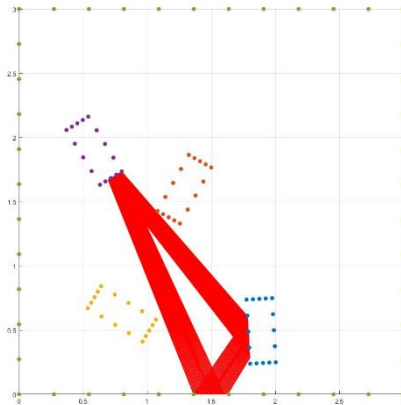

$$E_A = \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} E(\alpha_d, \alpha_a) d\alpha_d$$

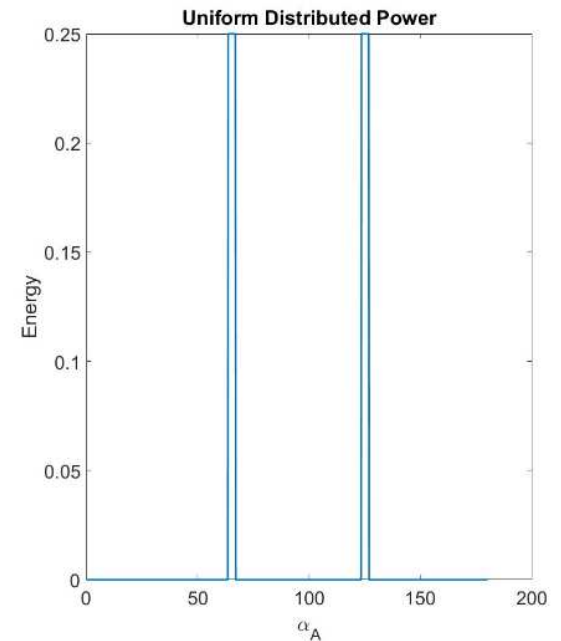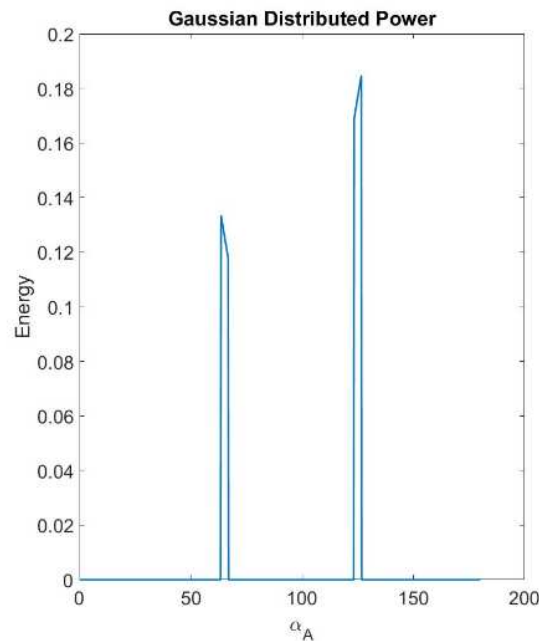

Geometrical Optics: Convergence

Convergence analysis of total energy coming back to the radar.


Marie Skłodowska-Curie
ITN-ETN

AdMoRe



$$\mathcal{E} = \frac{\|E_T^H - E_T^L\|}{E_T^H}$$

It converges!

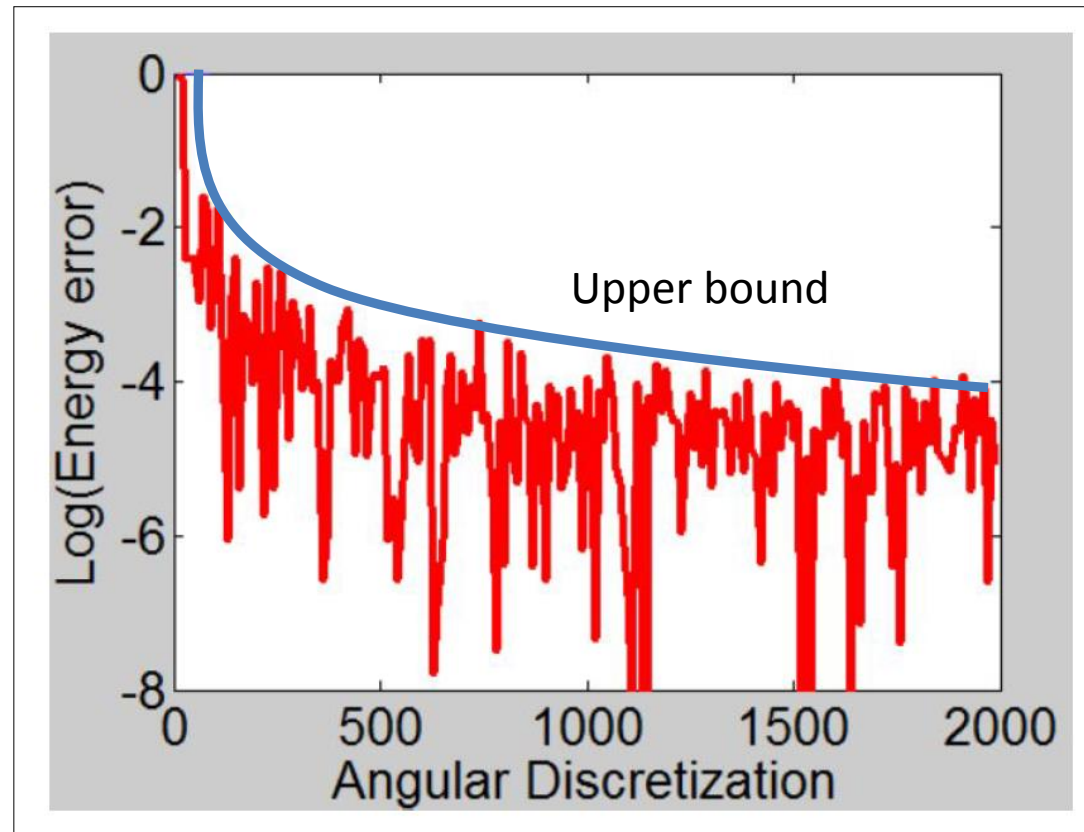



Marie Skłodowska-Curie
ITN-ETN

AdMoRe




BLACK-BOXING THE SCENARIO

Black Boxing the Scenario

Replace objects inside the scenario by a “black-box” and a transfer function.

Marie Skłodowska-Curie
ITN-ETN

AdMoRe

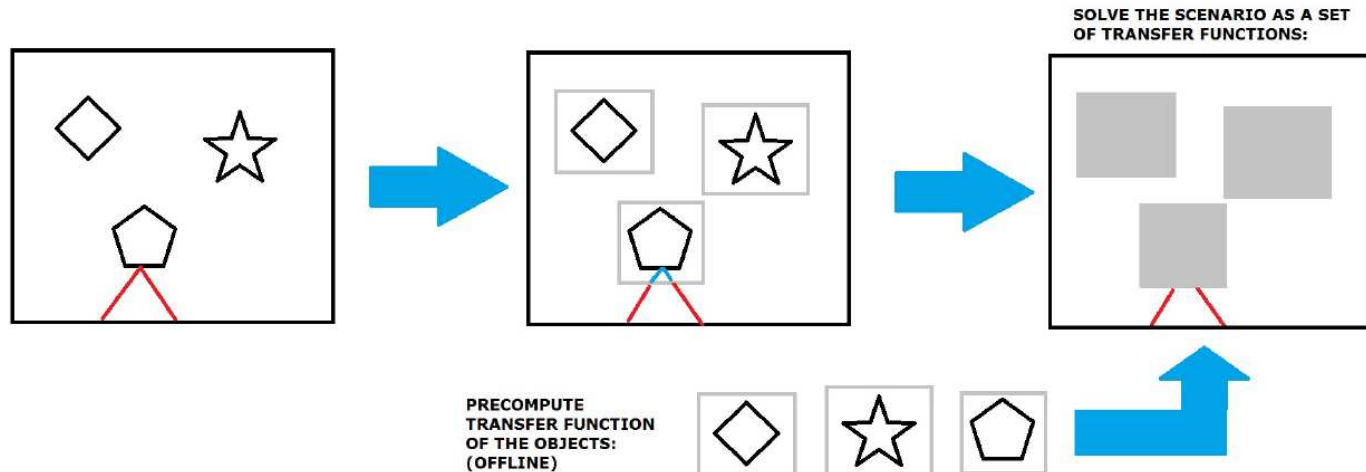

Advantages:


- Faster on-line simulations since only a box has to be meshed.
- Parameterization of the scenario becomes easier.

Black Boxing the Scenario

The transfer function can be seen as a manifold establishing geometrical and energetic relationships between input/output ray.

Marie Skłodowska-Curie
ITN-ETN

AdMoRe

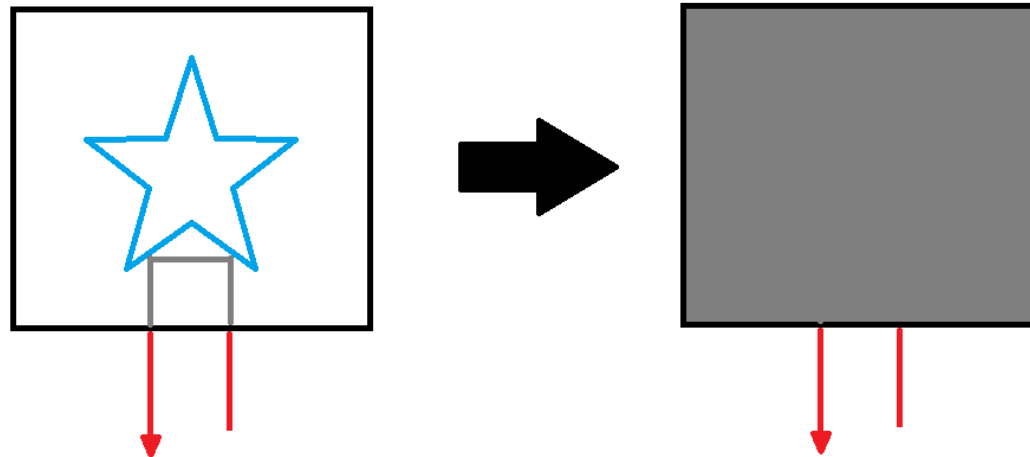

Indeed, input and output position and orientation of the ray just like the ratio of energy between incoming and outgoing ray will appear in the transfer function.

Black Boxing the Scenario

Example: Circle

X axis: Arc length of the square (starting from south-west corner, counterclockwise)

Y axis: Input ray orientation. **Absortion coefficient:** 0.5

Marie Skłodowska-Curie
ITN-ETN

AdMoRe

UPC
UNIVERSITAT POLITÈCNICA
DE CATALUNYA
BARCELONATECH

ECN



Swansea University
Prifysgol Abertawe
Centrale
Nantes

AIRBUS
GROUP

VOLKSWAGEN
AKTIENGESellschaft


SIEMENS

esi

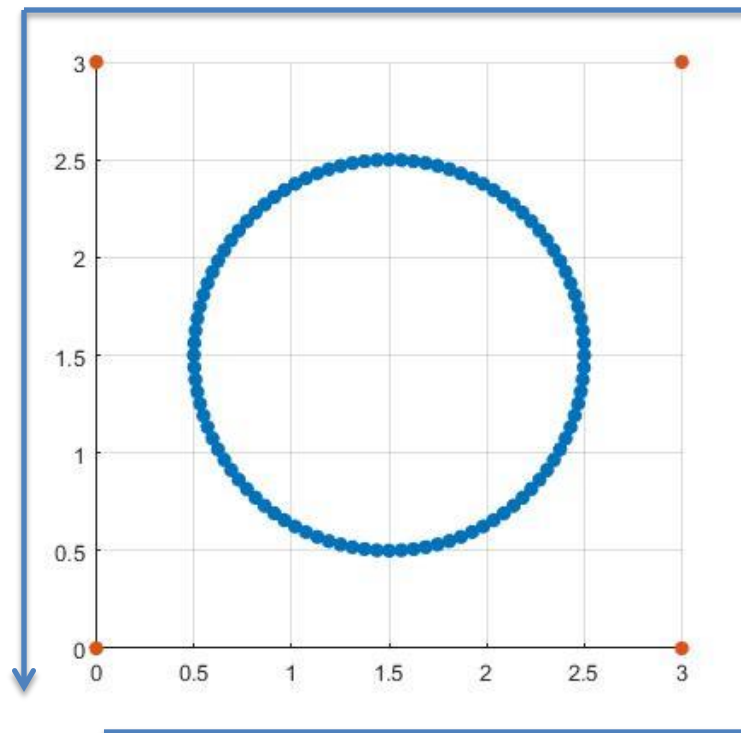


Black Boxing the Scenario

Example: Circle

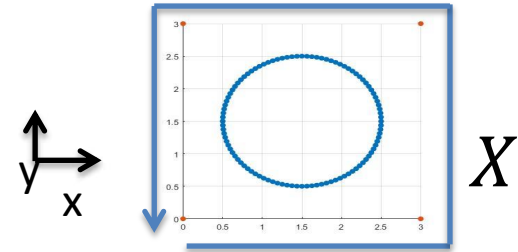


Marie Skłodowska-Curie
ITN-ETN

AdMoRe

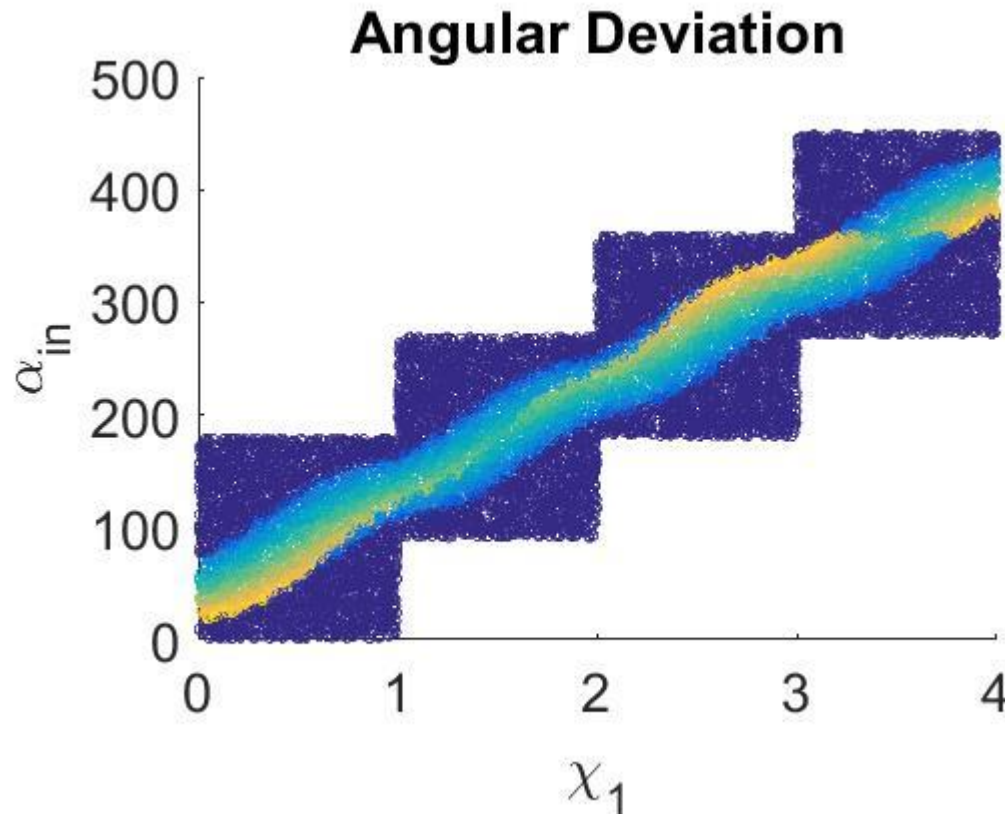


Black Boxing the Scenario

Example: Circle

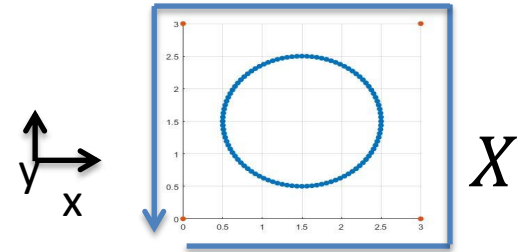


Marie Skłodowska-Curie
ITN-ETN

AdMoRe

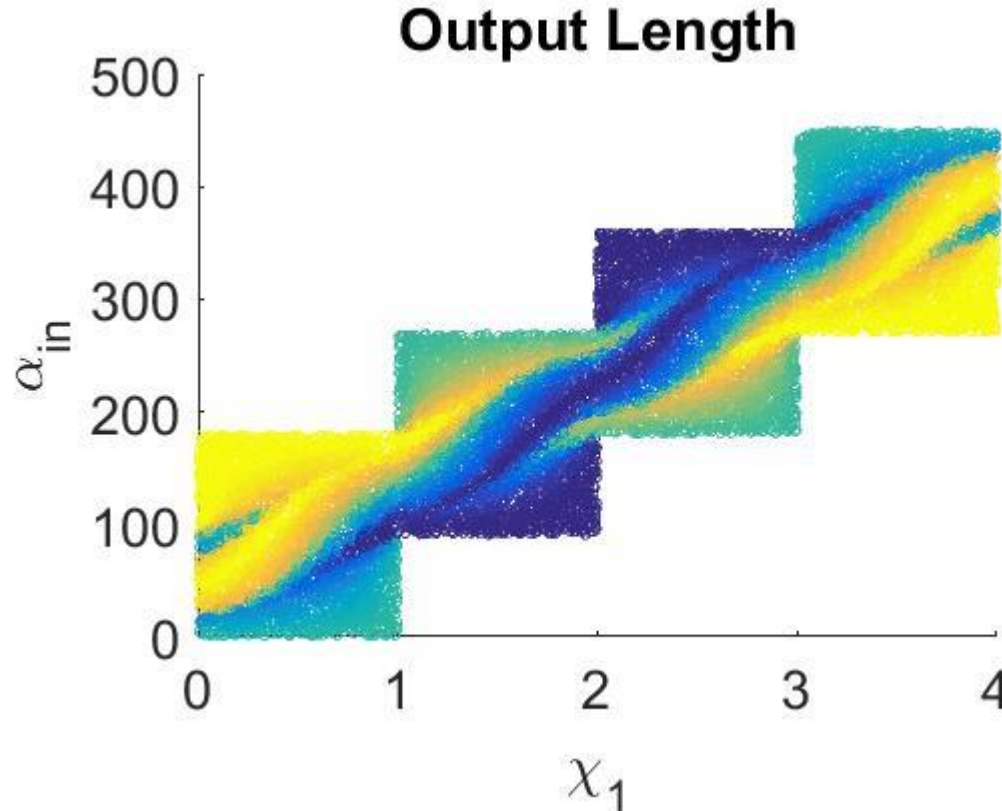


Black Boxing the Scenario

Example: Circle

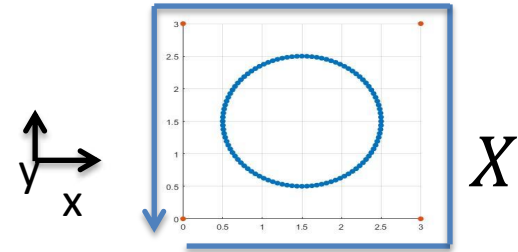

Marie Skłodowska-Curie
ITN-ETN

AdMoRe

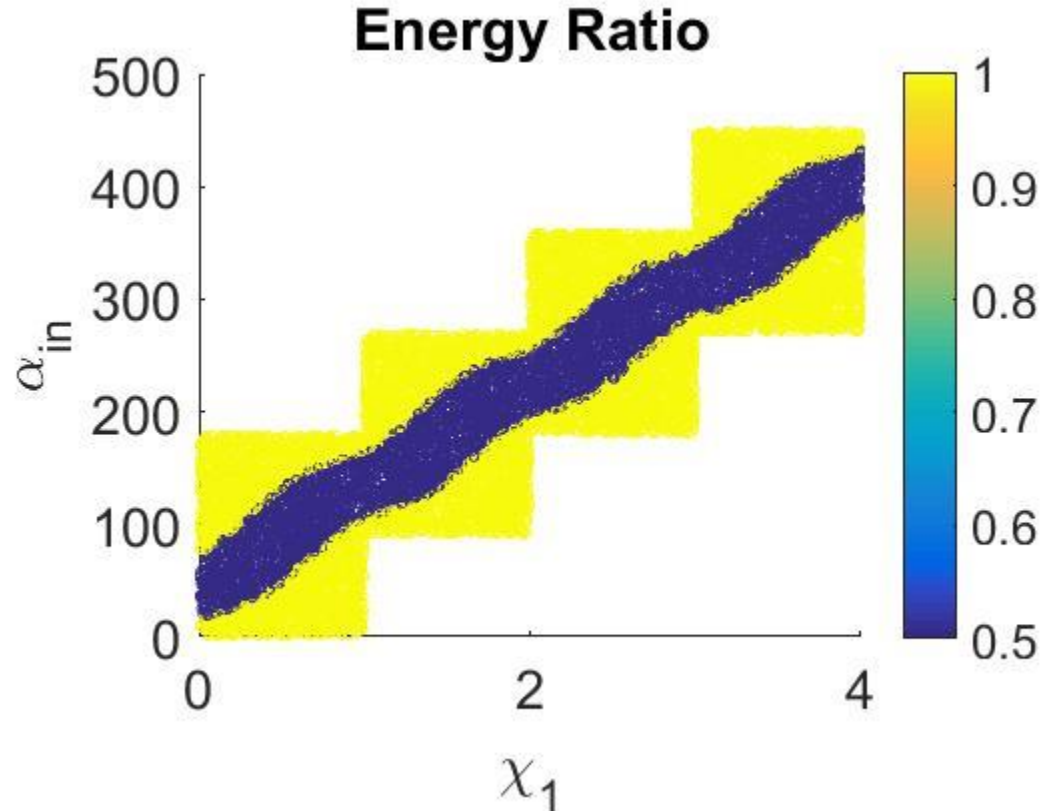

Black Boxing the Scenario

Example: Star

X axis: Arc length of the square (starting from south-west corner, counterclockwise)

Y axis: Input ray orientation. **Absorption coefficient:** 0.5

Marie Skłodowska-Curie
ITN-ETN

AdMoRe

UPC
UNIVERSITAT POLITÈCNICA
DE CATALUNYA
BARCELONATECH

ECN



Swansea University
Prifysgol Abertawe
Centrale
Nantes

AIRBUS
GROUP

VOLKSWAGEN
AKTIENGESellschaft


SIEMENS

esi

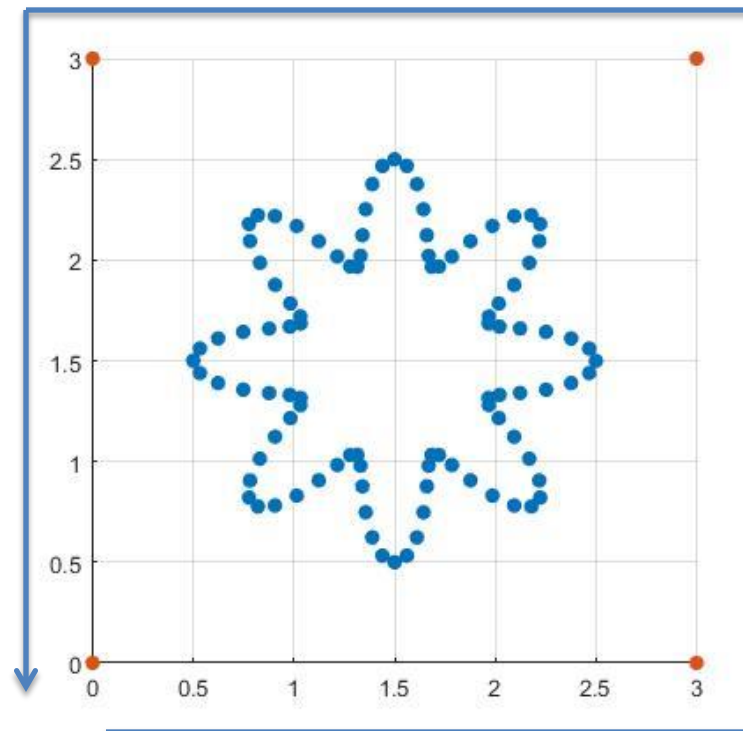


Black Boxing the Scenario

Example: Star

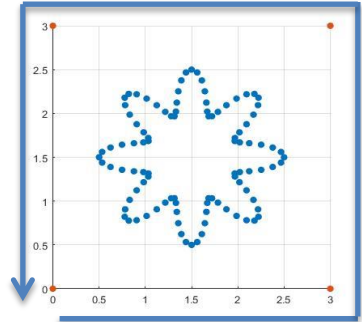

X

Angular Deviation

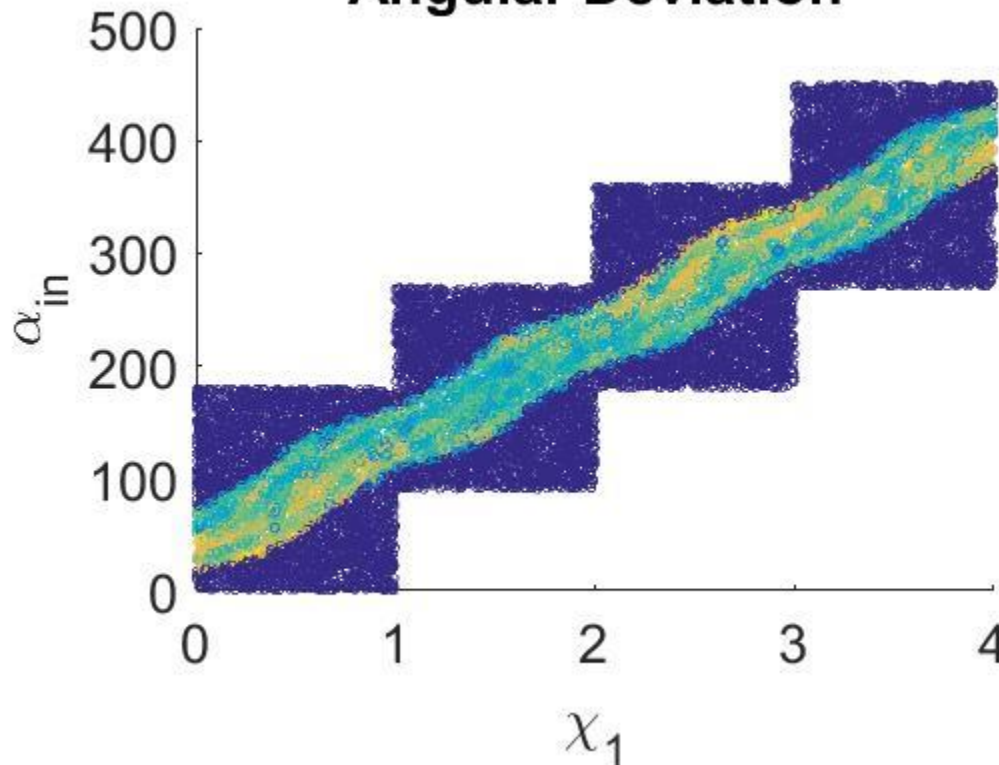


Marie Skłodowska-Curie
ITN-ETN

AdMoRe




Black Boxing the Scenario

Example: Star

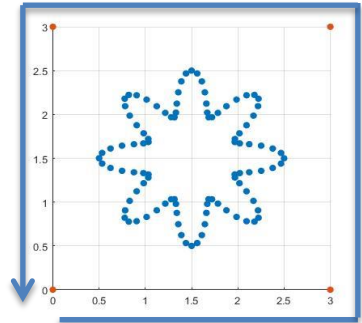

X

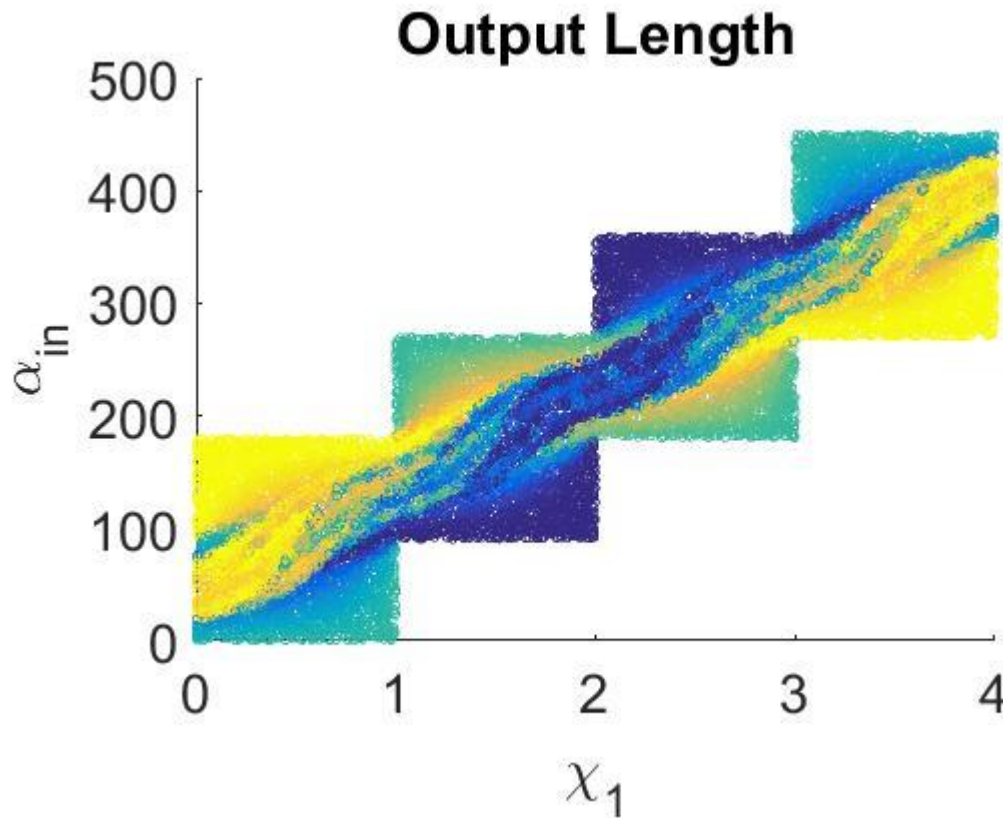


Marie Skłodowska-Curie
ITN-ETN

AdMoRe




Black Boxing the Scenario

Example: Star

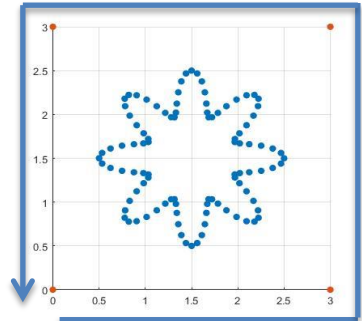

X

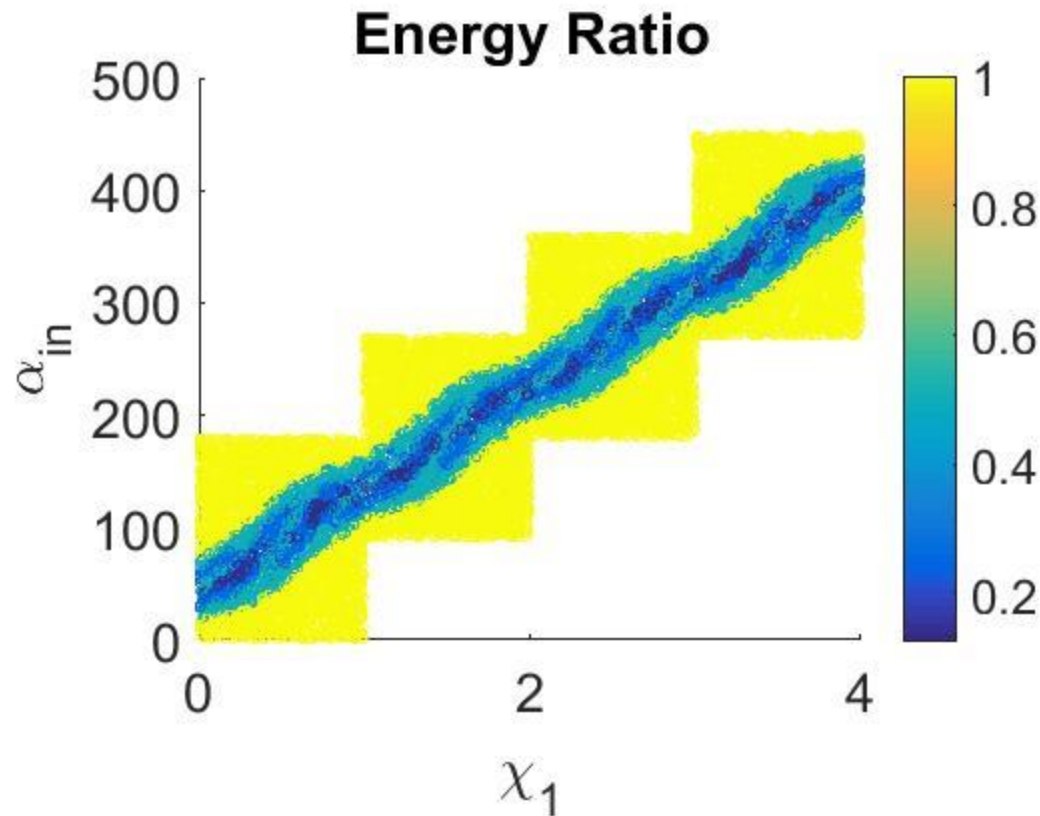

Marie Skłodowska-Curie
ITN-ETN

AdMoRe





Marie Skłodowska-Curie
ITN-ETN

AdMoRe



SCENARIO MANIFOLD

Scenario Manifold

Goals: Scenario identification knowing the electromagnetic response.

Marie Skłodowska-Curie
ITN-ETN

AdMoRe




Swansea University
Prifysgol Abertawe

Centrale
Nantes




AIRBUS
GROUP

VOLKSWAGEN
AKTIENGESellschaft



SIEMENS

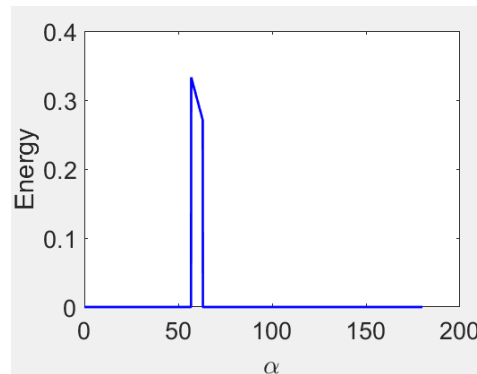


??



Determine where and how many receptors are needed to determine unequivocally a scenario.

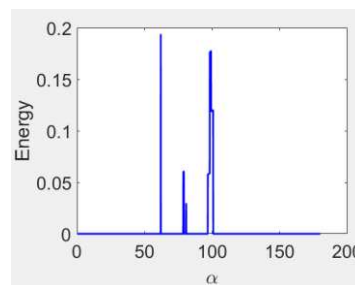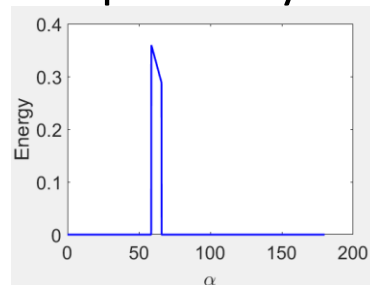

...

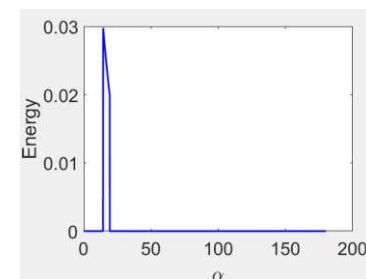

??

Scenario Manifold

Marie Skłodowska-Curie
ITN-ETN


AdMoRe

Let's assume that M scenarios are precomputed off-line.

The electromagnetic response of a single scenario is written as:

$$f(\alpha; \mathbf{p})$$

Where the blue terms are angular coordinates and the red ones are the parameterization of the manifold.

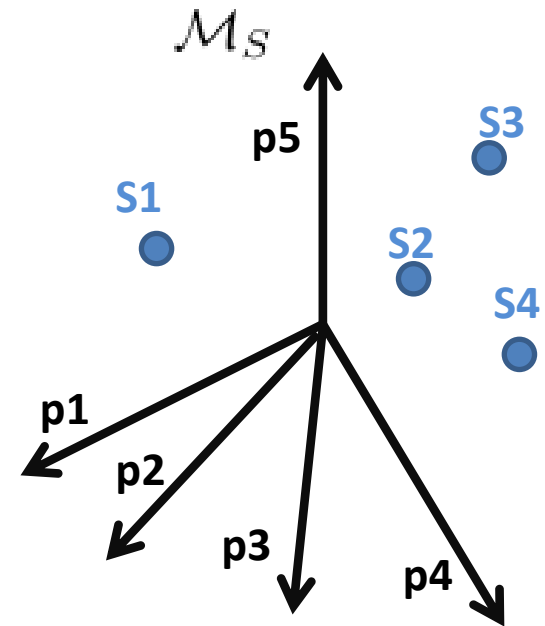

$$\min(\|f(\alpha; \mathbf{p}_n) - f(\alpha; \mathbf{p}_i)\|_{L_2}) \quad \forall \mathbf{p}_i \in \mathcal{M}_S$$



Those scenarios minimizing the functional will potential candidates for \mathbf{p}_n .

Scenario Manifold

Step 1: Find among all the data set, those scenarios with “similar” electromagnetic response.

Marie Skłodowska-Curie
ITN-ETN

AdMoRe

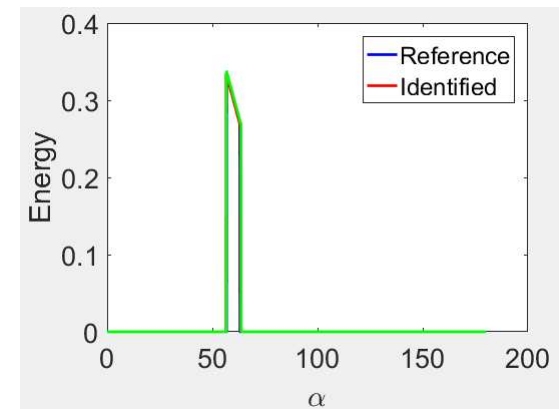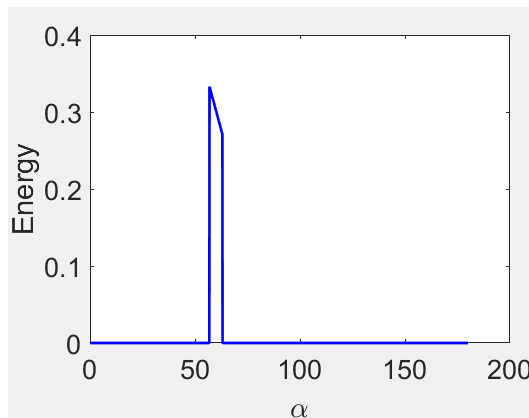

Result: Many scenarios satisfied the same electromagnetic response, but they were geometrically different.

Scenario Manifold


Step 2: A small subset of scenarios sharing the electromagnetic response is obtained.

Therefore, there will be some obstacles causing an impact in the electromagnetic response and some other which does not.

That is what we will call, **active** and **non active** scenario, respectively.


Making a covariance analysis:

| Colour | | | | |
|------------|----|----|----|----|
| | | | | |
| Covar. (%) | 63 | 92 | 60 | 61 |

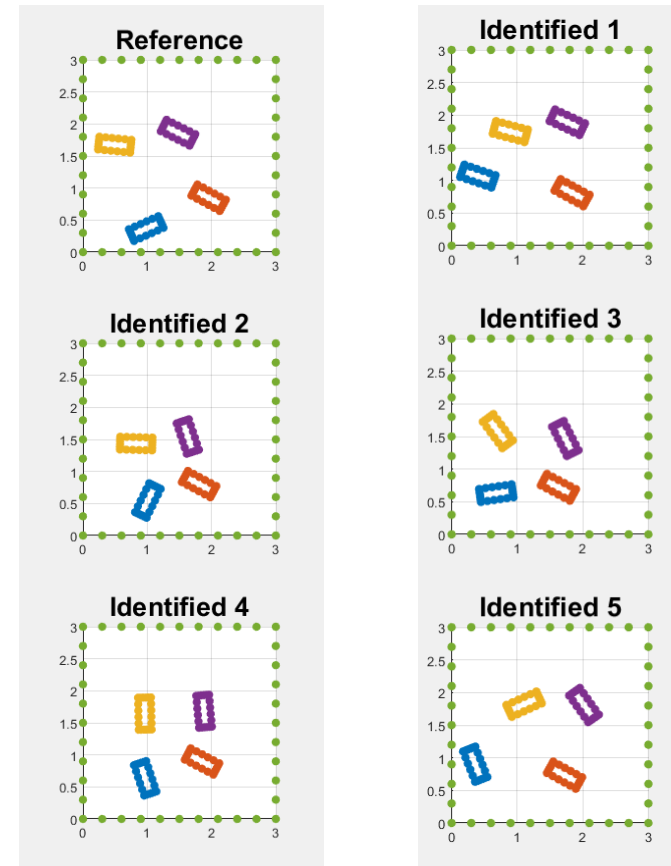


Scenario Manifold

Using three sensors..



Sensor locations

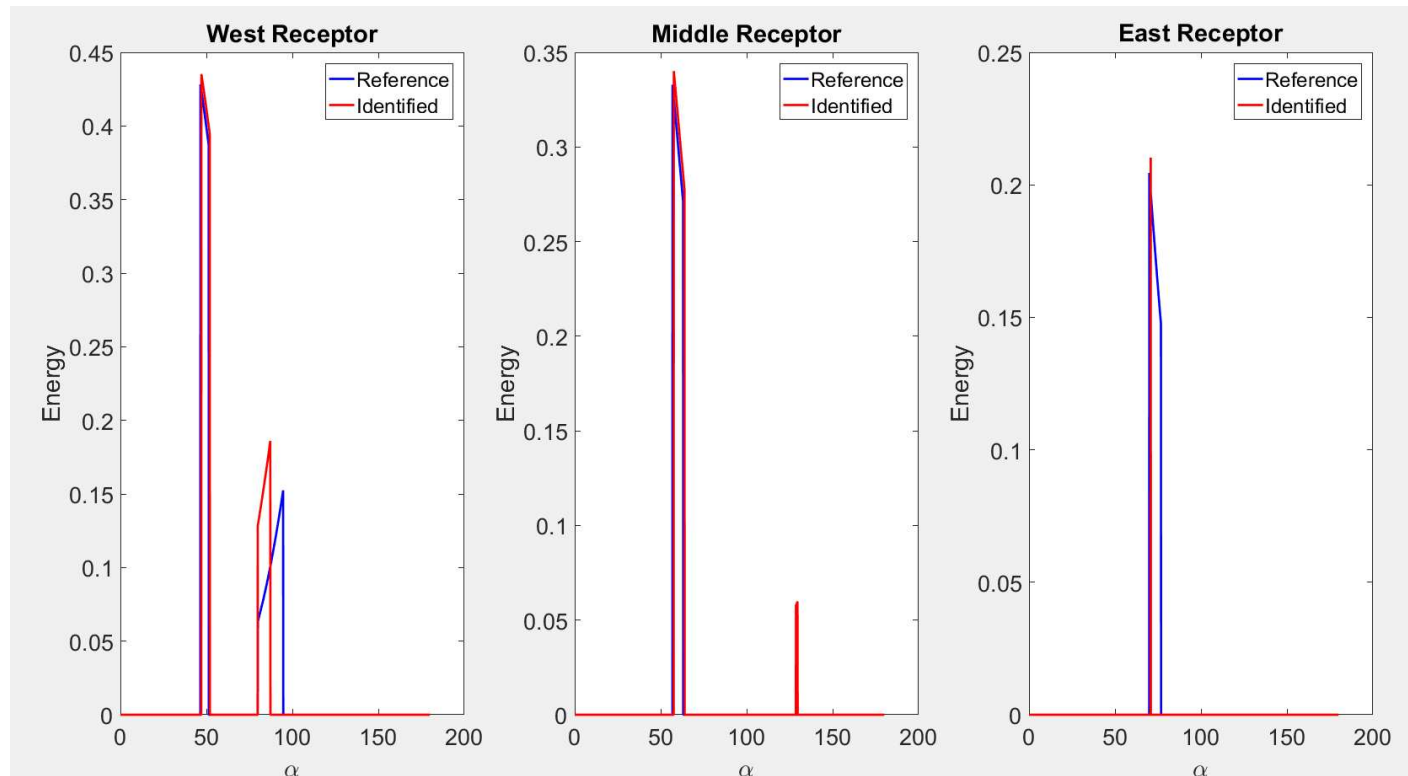

Marie Skłodowska-Curie
ITN-ETN

AdMoRe

UPC UNIVERSITAT POLITÈCNICA DE CATALUNYA BARCELONATECH

Swansea University Prifysgol Abertawe Centrale Nantes

AIRBUS GROUP

VOLKSWAGEN AKTIENGESellschaft

SIEMENS

esi

Scenario Manifold

Marie Skłodowska-Curie
ITN-ETN

AdMoRe


New subset of scenarios gives a covariance.

3 Sensors covariance

| Colour | | | | |
|------------|----|----|----|----|
| Covar. (%) | 68 | 95 | 61 | 65 |

1 Sensor covariance

| Colour | | | | |
|------------|----|----|----|----|
| Covar. (%) | 63 | 92 | 60 | 61 |

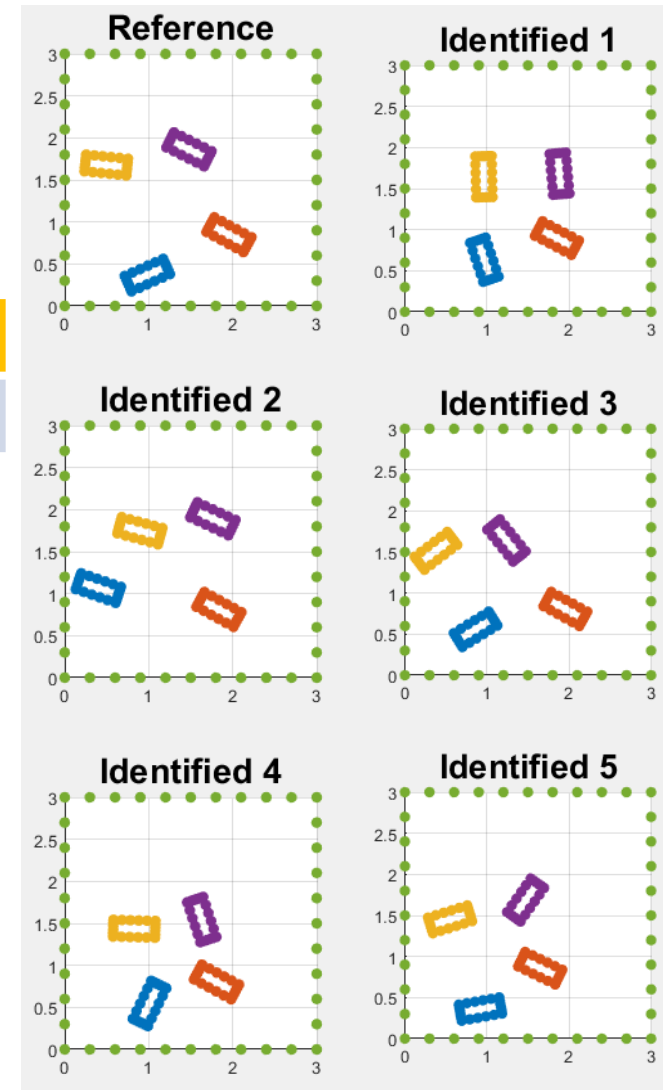

Scenario Manifold

Marie Skłodowska-Curie
ITN-ETN

AdMoRe


How to distinguish redundant data in the parameterization of the manifold?

Computing the difference of the electromagnetic response between two scenarios (red line) can be seen as a directional derivative in the manifold.

$$\nabla_{\mathbf{p}} f \cdot \frac{\mathbf{d}}{\|\mathbf{d}\|} \simeq \frac{f_{S2} - f_{S1}}{\|\mathbf{d}\|}$$

Making all pairwise combinations in the local neighbourhood allows to estimate the gradient in a point.

All \mathbf{p} parameters whose derivative is negligible can be inferred as redundant data.

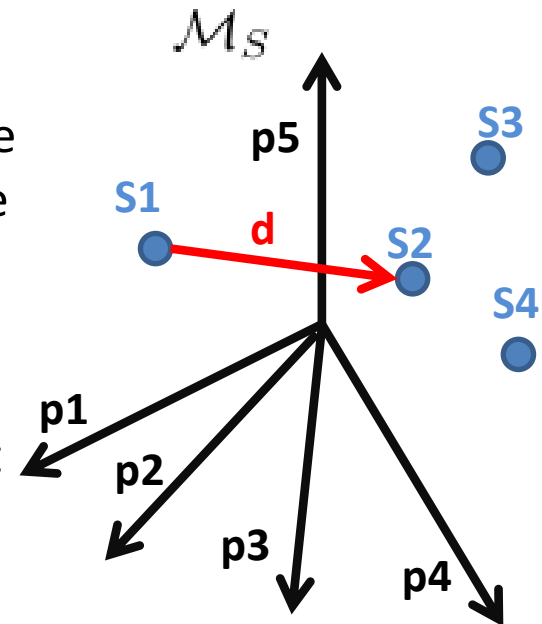

Future prospects

Geometrical Optics

- Comparison with Maxwell Equations.

Black-Boxing the Scenario


- Reduce the cost of computing a transfer function. Smart selection of query points to do interpolation in the rest of the input domain.

Scenario Manifold

- Add more sensors to better distinguish different scenarios.
- Differentiate active obstacles from redundant obstacles based on the directional derivative or covariogram based.

Domain Decomposition

- Having a physical domain partitioned in such a way that in some areas geometrical optics is solved and in another areas Maxwell equations.

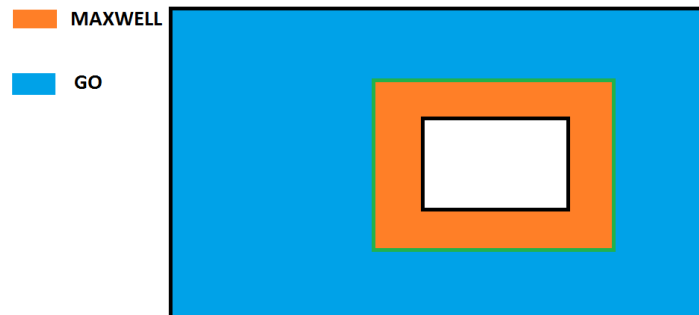



Marie Skłodowska-Curie
ITN-ETN

AdMoRe



**THANK YOU FOR
THE ATTENTION.**

QUESTIONS?